



ONVIF 5 Megapixel Vandal Dome

IP Camera



NEW 2014 MAR. V1.1



IP Surveillance VIT-DA551

- High quality 1/2.5" CMOS Sensor.
- Real-time H.264, MPEG-4 and MJPEG Compression (Triple Codec).
- Resolution : 5 Mega Pixel 2592x1920.
- Simultaneous Multiple Streams.
- 30 Pcs IR LEDs/ IR Range: 30M.
- Supports ONVIF Standard to Simplify Integration and Enhance Interoperability.
- Built-in MicroSD/SDHC Card Slot for On-board Storage.
- Supports ONVIF Standard to Simplify Integration and Enhance Interoperability.
- Support Audio line-in for external microphone.
- Vandal-Resistant Case Design.

VIT-DA551 5 Megapixel Vandal Dome IP Camera




OPTIONAL

SPECIFICATIONS

System	CPU : TI TMS320DM368	
	Flash : 256MB	
	RAM : 128MB	
Image Sensor	High Quality 1/2.5"CMOS	
Lens	Varifocal 3.5-10mm F1.6	
	Removable IR-cut filter for day & night function	
Sensitivity	0 Lux(IR ON)	
IR LED / IR Range	30PCS LEDs / 30M	
Video	H.264: 30 fps at 1920x1080 , Highest Resolution: 10 fps at 2592x1920	
	MPEG4: 30 fps at 1920x1080	
	MJPEG: 30 fps at 1920x1080 , Highest Resolution: 10 fps at 2592x1920	
	Compression: H.264, MPEG-4 & MJPEG Streaming: Triple Codec (H.264 、MPEG-4 、JPEG) Selectable	
	Support Simultaneous multiple streams	
	BNC connector for video output ; NTSC/PAL video output switch	
Image Settings	Adjustable image size, quality, and bit rate	
	Time/Date stamp and text caption overlay.	
	Configurable brightness, contrast, saturation, sharpness, white balance and exposure AGC / AWB / AES / BLC	
Audio	Format	MPEG-4 AAC audio encoding G.711 audio encoding
	Support Audio line-in for external microphone	
Networking	Interface	10/100 Mbps Ethernet, RJ-45
	Supported Protocol	IPv4,TCP/IP,DHCP,HTTP,RTSP,SNTP,DNS
	Supported Browser	Microsoft Internet Explorer 6.0 or above. QuickTime Player is necessary add-in for Safari, Chrome or Firefox
Alarm and Event Management	Motion Detection	
	Event notification using SMTP or FTP through CMS FCW-SE064	
	Smart Motion Detection Triggered Nighttime color image	
Users	8 clients on-line monitoring at the same time	
	Multi-level user access control with password protection	
On-board Storage	Micro SD/SDHC card slot : Stores snapshots and video clips	
Maintenance	Supports online firmware upgrade	
I/O	RJ-45 Ethernet x 1,DC Jack x 1,BNC Video out,Phone Jack Line in x 1,MicroSD Slot*1	
Power	DC12V or PoE IEEE802.3af Class 0(Optional)	
Weight	Netweight : 1050g	
Dimension	W:Φ150mm H:110mm	
Operating Environments	Temperature: -10 ~ 55 °C ; Humidity: 90%	

★Product specifications are subject to change without notice; please contact us for the latest information.

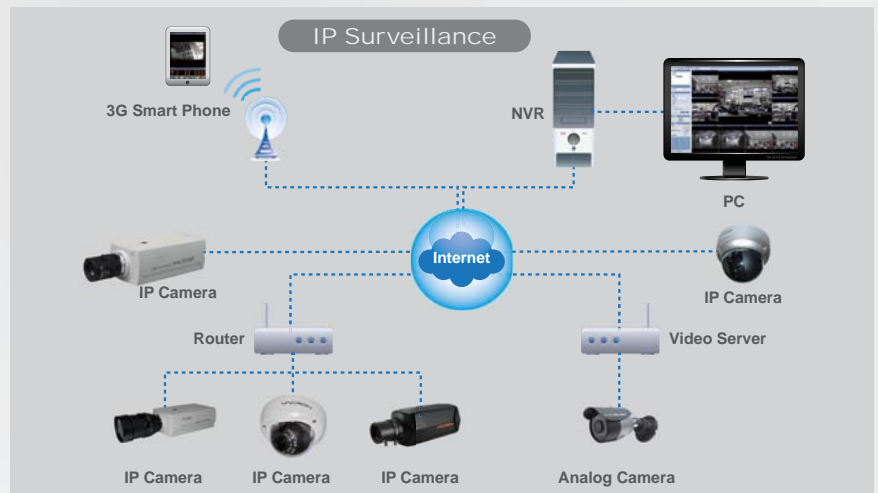

■ DISTRIBUTED BY

GDF Matériel d'équipement
Tel.: +216 71 393 599,
Fax: +216 71 393 608
Tunis, Route de Ben Arous,
Km 3 (Z. I. Sidi Fathallah)