



ONVIF

3 Megapixel IR Bullet

IP Camera



NEW 2014 MAR. V1.1



IP Surveillance

VIT-UA621

- High quality 1/2.5" CMOS Sensor
- Simultaneous Multiple Streams
- Real-time H.264, MPEG-4 and MJPEG Compression (Triple Codec)
- 3.6mm F1.6 Lens, 28 Pcs IR LED
- Auto IR cut filter for Day and Night
- Built-in SD/SDHC Card Slot for On-board Storage.
- Supported Audio line-in for external microphone
- Supports ONVIF Standard to Simplify Integration and Enhance Interoperability
- Supports H/W Watchdog
- Power supplied through PoE (IEEE 802.3at)
- Ingress protection (IP66)

VIT-UA621 3 Megapixel IR Bullet IP Camera





Cable Installing Instruction



1. VIDEO
2. LINE IN
3. POWER
4. LANPORT

Dimension Unit: mm

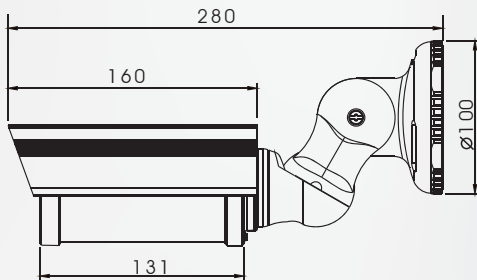

SPECIFICATIONS

System	CPU	TI DM365
	SoC Flash	32MB
	RAM	128MB
Image Sensor	1/2.5"CMOS	
Lens	Board Lens 3.6mm F1.6	
IR-cut	Removable IR-cut filter for day & night function	
Sensitivity	0 Lux (IR ON)	
IR LEDs / IR Range	28pcs / 25M	
Video	H.264: 30 fps at 1280x720, Highest Resolution: 15 fps at 2048x1536	
	MPEG4: 30 fps at 1280x720, Highest Resolution: 23 fps at 1920x1080	
	MJPEG: 30 fps at 1280x720, Highest Resolution: 15 fps at 2048x1536	
	Compression: H.264, MPEG-4 & MJPEG Streaming:	
	Triple Codec (H.264 \ MPEG-4 \ JPEG) Selectable	
	Support Simultaneous multiple streams	
	BNC connector for video output, NTSC/PAL video output switch	
Image Settings	Adjustable image size, quality, and bit rate	
	Time/Date stamp and text caption overlay.	
	Configurable brightness, contrast, saturation, sharpness,	
	white balance and exposure AGC / AWB / AES / BLC	
Audio	Format	MPEG-4 AAC audio encoding G.711 audio encoding
	Support Audio line-in for external microphone	
	Network	Interface
Network	Supported Protocol	IPv4, TCP/IP, DHCP, HTTP, RTSP, SNT, DNS
	Supported Browser	Microsoft Internet Explorer 6.0 or above
	Alarm and Event management	Motion Detection Event notification using SMTP or FTP through CMS FCW-SE064
I/O port	RJ-45 Ethernet x 1, DC Jack x 1, BNC Video out, Phone Jack Line in x 1	
On-board Storage	SD/SDHC card slot : Stores snapshots and video clips	
Maintenance	Supports online firmware upgrade	
Power supply	DC12V or PoE IEEE802.3af Class 0	
Weight	600g	
Dimension	Ø74 x 130 x 280 mm	
Operating Environments	Temperature: 0 ~ 45 °C	
	Humidity: 90%	

★ Product specifications are subject to change without notice; please contact us for the latest information.

DISTRIBUTED BY

GDF Matériel d'équipement
Tel.: +216 71 393 599,
Fax: +216 71 393 608
Tunis, Route de Ben Arous,
Km 3 (Z. I. Sidi Fathallah)

