



ONVIF

2 Megapixel IR Bullet

IP Camera



NEW 2014 MAR. V1.1



IP Surveillance

VIT-US621

- Sony Exmor 1/2.8" CMOS Image Sensor.
- Improved low-light performance.
- Real-time H.264, MPEG-4 and MJPEG Compression(Triple Codec).
- Resolution : 1920x1080 23fps.
- Simultaneous Multiple Streams.
- 28 IR LEDs.
- Supports ONVIF Standard to Simplify Integration and Enhance Interoperability.
- Support Audio line-in for external microphone

VIT-US621 2 Megapixel IR Bullet IP Camera





Cable Installing Instruction



1. VIDEO
2. LINE IN
3. POWER
4. LANPORT

Dimension Unit: mm

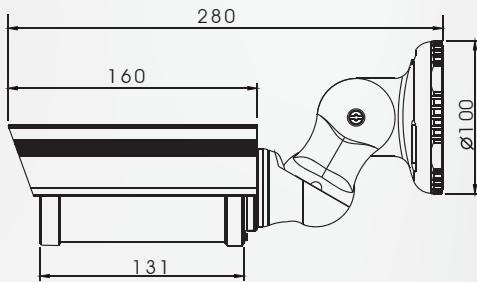

SPECIFICATIONS

System	Platform	: TI TMS320DM365	
	SoC Flash	: 32MB	
	RAM	: 128MB	
Image Sensor	FullHD High Quality 1/2.8"Sony Exmor CMOS Image Senso		
Lens	Board Lens 3.6 mm F1.6		
IR-cut	Removable IR-cut filter for day & night function		
Sensitivity	0 Lux (IR ON)		
IR LEDs	28pcs		
Video	H.264	: 23 fps at 1920x1080	
	MPEG4	: 23 fps at 1920x1080	
	MJPEG	: 23 fps at 1920x1080	
	Compression	: H.264, MPEG-4 & MJPEG Streaming:	
		Triple Codec (H.264 · MPEG-4 · JPEG) Selectable	
		Support Simultaneous multiple streams	
	BNC connector for video output, NTSC/PAL video output switch		
Image Settings	Adjustable image size, quality, and bit rate		
	Time/Date stamp and text caption overlay.		
	Configurable brightness, contrast, saturation, sharpness, white balance and exposure AGC / AWB / AES / BLC		
Audio	Format	MPEG-4 AAC audio encoding G.711 audio encoding	
	Support Audio line-in for external microphone		
Network	Interface	10/100 Mbps Ethernet, RJ-45	
	Supported Protocol	IPv4, TCP/IP, DHCP, HTTP, RTSP, SNTP, DNS	
	Supported Browser	Microsoft Internet Explorer 6.0 or above	
Alarm and Event management	Motion Detection		
	Event notification using SMTP or FTP through CMS FCW-SE064		
I/O port	RJ-45 Ethernet x 1, DC Jack x 1, BNC Video out, Phone Jack Line in x 1		
On-board Storage	Micro SD/SDHC card slot : Stores snapshots and video clips		
IP Rating	IP66		
Maintenance	Supports online firmware upgrade		
Power supply	DC12V or PoE IEEE802.3af Class 0		
Weight	600g		
Dimension	Φ74 x 130 x 280 mm		
Operating Environments	Temperature: -10 ~ 60 °C Humidity: 90%		

*Product specifications are subject to change without notice; please contact us for the latest information.

■ DISTRIBUTED BY

GDF Matériel d'équipement
Tel.: +216 71 393 599,
Fax: +216 71 393 608
Tunis, Route de Ben Arous,
Km 3 (Z. I. Sidi Fathallah)

