

ST-RE0405FH 0805FH 1605FH

4/8/16 Channel 960H Mini 1U Standalone DVR



Features

- > Up to 4/8/16 cameras with 1080p realtime preview
- > H.264 dual-stream video compression
- > RE0405FH/0805FH/1605FH: All channel 960H realtime recording
- > HDMI/VGA/TV simultaneous video output
- > 4/8/16 channel synchronous realtime playback, GRID interface & smart search
- > 3D intelligent positioning with Saitell PTZ dome camera
- > Support 1 SATA HDD up to 4TB, 2 USB2.0
- > Multiple network monitoring: Web viewer, CMS(DSS/Smart PSS)&Smart Phone(DMSS)

ST-RE0405FH 0805FH 1605FH


Technical Specifications

Model		ST-RE0405FH-V2	ST-RE0805FH	ST-RE1605FH
System				
Main Processor		Embedded processor		
Operating System		Embedded LINUX		
Video				
Input		4 channel, BNC	8 channel, BNC	16 channel, BNC
Standard		NTSC(525Line, 60f/s), PAL(625Line, 50f/s)		
Audio				
Input		1 channel, RCA		
Output		1 channel, RCA		
Two-way Talk		Reuse audio input/output channel 1		
Display				
Interface		1 HDMI, 1 VGA, 1 TV		
Resolution		1920× 1080, 1280× 1024, 1280× 720, 1024× 768, 800× 600		
Display Split		1/4	1/4/8/9	1/4/8/9/16
Privacy Masking		4 rectangular zones (each camera)		
OSD		Camera title, Time, Video loss, Camera lock, Motion detection, Recording		
Recording				
Video/Audio Compression		H.264/G.711		
Resolution		960H/D1/4CIF(704× 576/704× 480)/CIF(352× 288/352× 240)/QCIF(176× 144/176× 120)		
Record Rate	Main Stream:	960H/D1/HD1/2CIF/CIF(1~25/30fps)		
	Extra Stream	QCIF(1~25/30fps)/CIF(1~6/7fps)		
Bit Rate		48~3072Kb/s		
Record Mode		Manual, Schedule(Regular(Continuous), MD), Stop		
Record Interval		1~60 min (default: 60 min), Pre-record: 1~30 sec, Post-record: 10~300 sec		
Video Detection				
Trigger Events		Recording, PTZ, Tour, Video Push, Email, FTP, Spot, Snapshot, Buzzer &Screen tips		
Video Detection		Motion Detection, MD Zones: 396(22× 18), Video Loss & Camera Blank		
Playback & Backup				
Sync Playback		1/4	1/4/9	1/4/9/16
Search Mode		Time/Date, MD & Exact search (accurate to second)		
Playback Functions		Play, Pause, Stop, Rewind, Fast play, Slow play, Next file, Previous file ,Next camera, Previous camera, Full screen, Repeat, Shuffle, Backup, selection, Digital zoom		

ST-RE0405FH 0805FH 1605FH

Backup Mode	USB Device/Network/Internal SATA burner
Network	
Ethernet	RJ-45 port (10/100M)
Network Functions	HTTP, IPv4/IPv6, TCP/IP, UPNP, RTSP, UDP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, SNMP ,P2P
Max. User Access	128 users
Smart Phone	iPhone, iPad, Android, Windows Phone
Storage	
Internal HDD	1 SATA port, up to 4TB
Auxiliary Interface	
USB Interface	2 ports (1 Rear), USB2.0
RS485	PTZ control
General	
Power Supply	DC12V/2A
Power Consumption	10W(without HDD)
Working Environment	-10°C ~ +55°C /10%~90%RH / 86~106kpa
Dimension(W× D× H)	Mini 1U, 325mm× 245mm× 45mm
Weight	1.5KG(without HDD)

System Connection

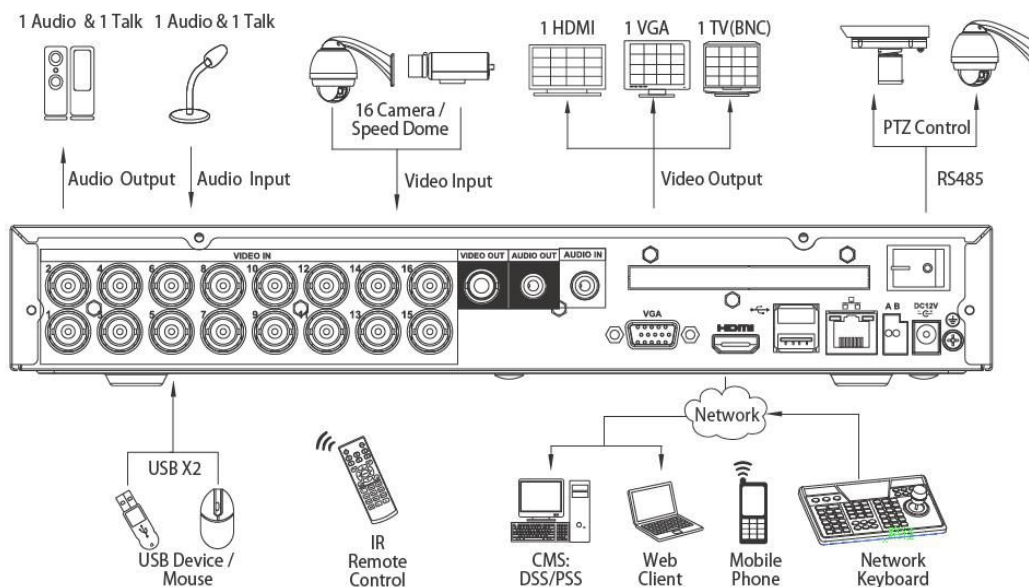

*Takes RE1605FH as an example

Saitell Technology Co., Ltd.

China Shenzhen Foreign Trade (Group) Building, 239 Zhongxing Road, Shenzhen, China

Tel: +86-755-22318209

Fax: +86-755-22318205

Email:sales@saitell.com

www.saitell.com

