

ST-RF0405 0805 1605GU-V2

4/8/16CH 2CIF Smart 1U Standalone DVR



Features

- Up to 8/16 cameras with 1080p realtime preview
- H.264 dual-stream video compression
- DVR2104/2108/2116C-V2: All channel 2CIF/960H recording
- HDMI/VGA/TV simultaneous video output
- 4/8/16 channel synchronous realtime playback, GRID interface & smart search
- Support 1 SATA HDD up to 4TB, 2 USB2.0
- Multiple network monitoring: Web viewer, CMS(DSS/Smart PSS)&Smart Phone(DMSS)

Saitell Technology Co., Ltd.

China Shenzhen Foreign Trade (Group) Building, 239 Zhongxing Road, Shenzhen, China
Tel: +86-755-22318209 Fax: +86-755-22318205 Email:sales@saitell.com www.saitell.com

ST-RF0405 0805 1605GU-V2

Specifications:

Model	ST-RF0405GU-V2	ST-RF0805GU-V2	ST-RF1605GU-V2	
System				
Main Processor	Embedded processor			
Operating System	Embedded LINUX			
Video				
Input	4 channel, BNC	8 channel, BNC	16 channel, BNC	
Standard	NTSC(525Line, 60f/s), PAL(625Line, 50f/s)			
Audio				
Input	1 channel, RCA			
Output	1 channel, RCA			
Two-way Talk	Reuse audio input/output channel 1			
Display				
Interface	1 HDMI, 1 VGA, 1TV			
Resolution	1920×1080, 1280×1024, 1280×720, 1024×768			
Display Split	1/4	1/4/8/9	1/4/8/9/16	
Privacy Masking	4 rectangular zones (each camera)			
OSD	Camera title, Time, Video loss, Camera lock, Motion detection, Recording			
Recording				
Video/Audio Compression	H.264/G.711			
Resolution	960H(960×576/960×480)/D1(704×576/704×480)/2CIF(704×288/704×240)/CIF(352×288/352×240)/ QCIF(176×144/176×120)			
Record Rate	Main Stream:	1ch@960H+3ch@CIF(1~2 5/30fps)/D1(1~12/15fps)	2ch@960H+6ch@CIF(1~2 5/30fps)/D1(1~12/15fps)	4ch@960H+12ch@CIF(1~ 25/30fps)/D1(1~12/15fps)
	Extra Stream	QCIF(1~25/30ps)/CIF(1~6/7fps)		
Bit Rate	48~3072Kb/s			
Record Mode	Manual, Schedule(Regular(Continuous), MD), Stop			
Record Interval	1~60 min (default: 60 min), Pre-record: 1~30 sec, Post-record: 10~300 sec			
Video Detection				
Trigger Events	Recording, Tour, Video Push, Email, FTP, Snapshot, Buzzer & Screen tips			
Video Detection	Motion Detection, MD Zones: 396(22×18), Video Loss & Camera Blank			
Playback & Backup				
Sync Playback	1/4	1/4/9	1/4/9/16	
Search Mode	Time/Date, MD & Exact search (accurate to second)			
Playback Functions	Play, Pause, Stop, Rewind, Fast play, Slow play, Next file, Previous file, Next camera, Previous camera, Full screen, Repeat, Shuffle, Backup selection, Digital zoom			
Backup Mode	USB Device/Network/Internal SATA burner			
Network				


Saitell Technology Co., Ltd.

China Shenzhen Foreign Trade (Group) Building, 239 Zhongxing Road, Shenzhen, China
 Tel: +86-755-22318209 Fax: +86-755-22318205 Email:sales@saitell.com www.saitell.com

ST-RF0405 0805 1605GU-V2

Ethernet	RJ-45 port (10/100M)	
Network Functions	HTTP, IPv4/IPv6, TCP/IP, UPNP, RTSP, UDP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, SNMP, P2P	
Max. User Access	128 users	
Smart Phone	iPhone, iPad, Android, Windows Phone	
Storage		
Internal HDD	1 SATA port, up to 4TB	
Auxiliary Interface		
USB Interface	2 ports (2 Rear), USB2.0	2 ports (1 Rear), USB2.0
RS485	N/A	1 port, For PTZ control
General		
Power Supply	DC12V/2A	
Power Consumption	10W(without HDD)	
Working Environment	-10°C ~+55°C / 10%~90%RH / 86~106kpa	
Dimension(W×D×H)	205mm×205mm	270mm×205mm×40mm
Weight	0.5KG	0.75KG

System Connection

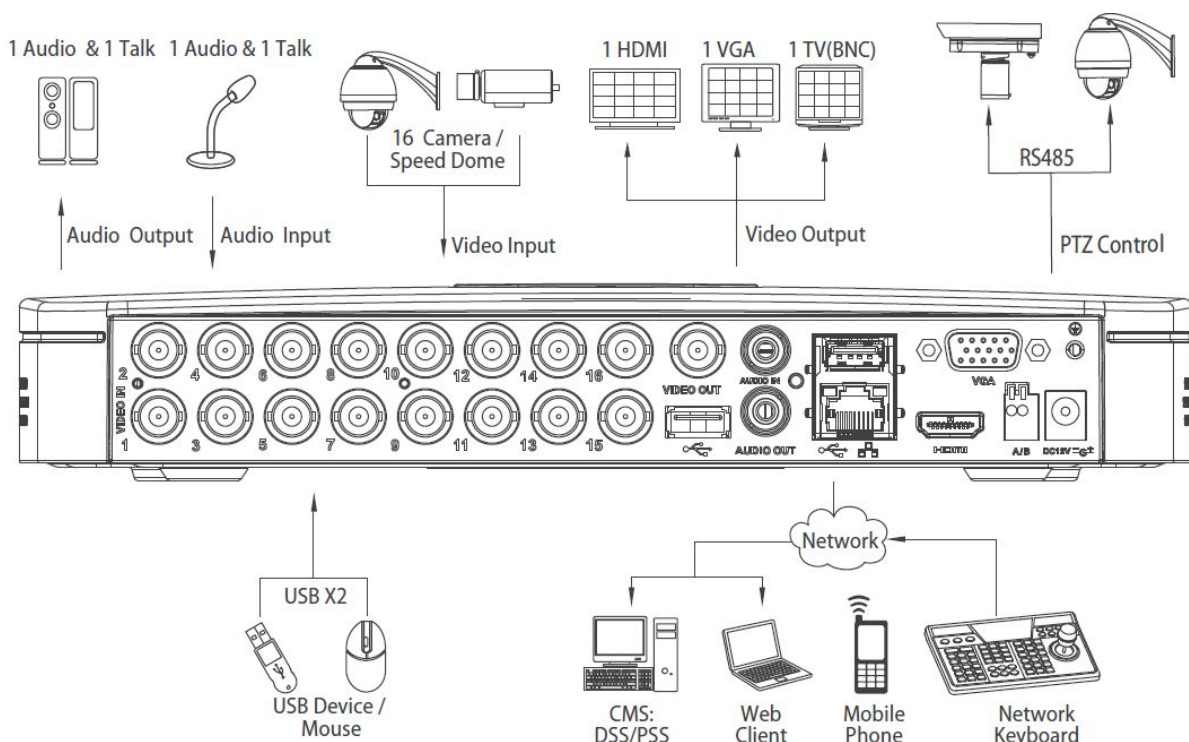

*Takes RF1605GU-V2 as an example

Saitell Technology Co., Ltd.

China Shenzhen Foreign Trade (Group) Building, 239 Zhongxing Road, Shenzhen, China
 Tel: +86-755-22318209 Fax: +86-755-22318205 Email:sales@saitell.com www.saitell.com

ST-RF0405 0805 1605GU-V2

Model		ST-RF0405GU-V2	ST-RF0805GU-V2	ST-RF1605GU-V2
System				
Main Processor		Embedded processor		
Operating System		Embedded LINUX		
Video				
Input		4 channel, BNC	8 channel, BNC	16 channel, BNC
Standard		NTSC(525Line, 60f/s), PAL(625Line, 50f/s)		
Audio				
Input		1 channel, RCA		
Output		1 channel, RCA		
Two-way Talk		Reuse audio input/output channel 1		
Display				
Interface		1 HDMI, 1 VGA, 1TV		
Resolution		1920×1080, 1280×1024, 1280×720, 1024×768		
Display Split		1/4	1/4/8/9	1/4/8/9/16
Privacy Masking		4 rectangular zones (each camera)		
OSD		Camera title, Time, Video loss, Camera lock, Motion detection, Recording		
Recording				
Video/Audio Compression		H.264/G.711		
Resolution		960H(960x576/960x480)/D1(704x576/704x480)/2CIF(704×288/704×240)/CIF(352×288/352×240)/QCIF(176×144/176×120)		
Record Rate	Main Stream:	1ch@960H+3ch @CIF(1~25/30fps) /D1(1~12/15fps)	2ch@960H+6ch @CIF(1~25/30fps) /D1(1~12/15fps)	4ch@960H+12ch @CIF(1~25/30fps) /D1(1~12/15fps)
	Extra Stream	QCIF(1~25/30ps)/CIF(1~6/7fps)		
Bit Rate		48~3072Kb/s		
Record Mode		Manual, Schedule(Regular(Continuous), MD), Stop		
Record Interval		1~60 min (default: 60 min), Pre-record: 1~30 sec, Post-record: 10~300 sec		
Video Detection				
Trigger Events		Recording, Tour, Video Push, Email, FTP, Snapshot, Buzzer & Screen tips		
Video Detection		Motion Detection, MD Zones: 396(22×18), Video Loss & Camera Blank		
Playback & Backup				
Sync Playback		1/4	1/4/9	1/4/9/16

Saitell Technology Co., Ltd.

China Shenzhen Foreign Trade (Group) Building, 239 Zhongxing Road, Shenzhen, China
 Tel: +86-755-22318209 Fax: +86-755-22318205 Email:sales@saitell.com www.saitell.com

ST-RF0405 0805 1605GU-V2

Search Mode	Time/Date, MD & Exact search (accurate to second)	
Playback Functions	Play, Pause, Stop, Rewind, Fast play, Slow play, Next file, Previous file, Next camera, Previous camera, Full screen, Repeat, Shuffle, Backup selection, Digital zoom	
Backup Mode	USB Device/Network/Internal SATA burner	
Network		
Ethernet	RJ-45 port (10/100M)	
Network Functions	HTTP, IPv4/IPv6, TCP/IP, UPNP, RTSP, UDP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, SNMP, P2P	
Max. User Access	128 users	
Smart Phone	iPhone, iPad, Android, Windows Phone	
Storage		
Internal HDD	1 SATA port, up to 4TB	
Auxiliary Interface		
USB Interface	2 ports (2 Rear), USB2.0	2 ports (1 Rear), USB2.0
RS485	N/A	1 port, For PTZ control
General		
Power Supply	DC12V/2A	
Power Consumption	10W(without HDD)	
Working Environment	-10°C ~ +55°C / 10%~90%RH / 86~106kpa	
Dimension(W×D×H)	205mm×205mm	270mm×205mm×40mm
Weight	0.5KG	0.75KG

Saitell Technology Co., Ltd.

China Shenzhen Foreign Trade (Group) Building, 239 Zhongxing Road, Shenzhen, China
 Tel: +86-755-22318209 Fax: +86-755-22318205 Email:sales@saitell.com www.saitell.com