

VAS-720 OUTDOOR SIREN

General Features

- Microprocessor controlled
- Two different siren speeds
- Automatic cut off time, adjustable between 3-15 minutes
- White ABS housing with 3 mm thickness
- Red window
- Sliding 2 LEDs
- Metal or plastic protection options (Covers the whole components, not only the electronic board)
- Tamper protection for removal of the top cover from the body of the siren or removal of the siren from the wall
- Power voltage from battery or panel during alarm (SAB or SAC)
- Recommended for negative trigger
- Negative tamper option
- Wide and smooth area for company logo


Technical Specifications

- Power input: 9-14V DC, nominal 12V DC
- Frequency: 1400-3000Hz
- Sound level: 118dB
- Internal rechargeable battery: 6V, 330mAh
- Current at SAB mode @12V: 200mA
- Current at SCB mode @12V: 25mA
- Strobe current @12V: 100mA
- Stand by current @12V: 25mA
- Strobe frequency @12V: 1.0Hz
- Dimensions: 215x300x60mm
- Weight: 1354kg

VAS-700 / VAS-701 DUMMY SIRENS

- VAS-701, 6 sliding LEDs
- VAS-700 empty siren box
- Wide and smooth area for company logo
- Blue or red window options

Plastic Protection

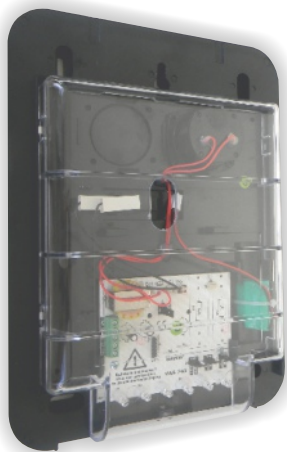

Metal Protection

