

# FINGERPRINT TIME ATTENDANCE TERMINAL

Waterproof, Dustproof and Shockproof



Portable Device with a Rubber Coating



Built-in Wi-Fi  
(optional)



GPRS  
(standard)



Background




Battery

- Built-in 7600 mAh battery powered 28 hours of standby time, 16 hours of operation time
- Communication via TCP/IP, USB-host and GPRS optional with Wi-Fi and 3G(WCDMA)
- IP65 rated waterproof and dustproof protection grade
- Shockproof (1m above the ground)
- Rubber coated protection
- Convenient carry case design

TFT500P

## SKETCH DIAGRAM

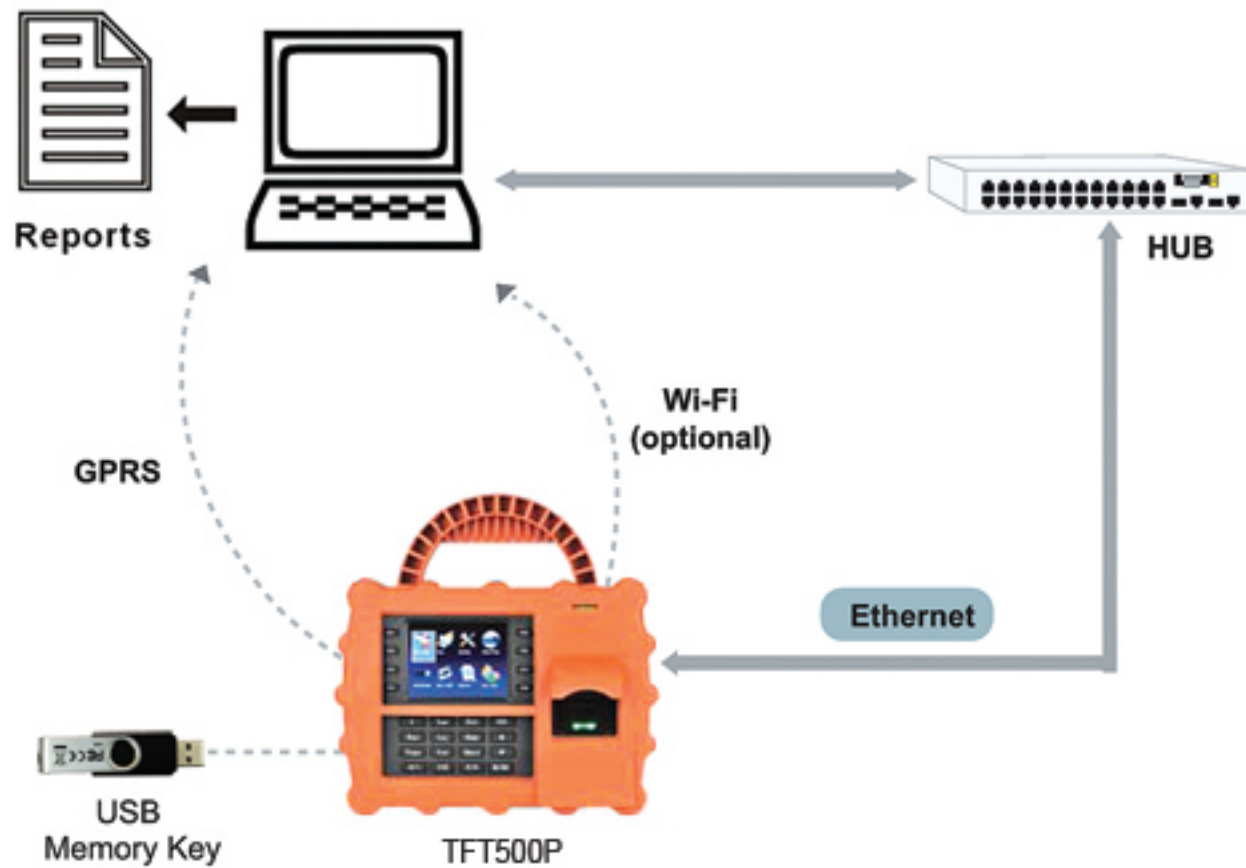

## SPECIFICATION

## TFT500P

### LCD Display

3.5-inch TFT screen

### Speaker

Beep

### Capacity

Fingerprint: 5,000(standard)/ 10,000(optional)

Card: 30,000(optional) Logs: 200,000

### Identification

FRR ≤ 0.01% FAR ≤ 0.0001%

### Verification

Verification speed (1:1) ≤ 0.5s

Identification speed (1:1) ≤ 1s

### Attendance status

Check in, Check out

### Communications

TCP/IP, USB-host, GPRS (support 800M/900M/1800M/1900M whole-band frequency sim card)

Wi-Fi(optional)

### Language

Multi language, English, French, Spanish, Arabic, Turkish, Portuguese, Czech, Hebrew, Slavic, Vietnamese etc., for more than 40 languages can be selected

### Environment

Operation temperature: 0°C-45°C Operation humidity: 20%-80%

### Power Supply

12V/3A, Built-in Backup 7600 mAh Battery

### Package info.

Machine size: 22.5(L)\*23.5(W)\*12.5(H)cm Unit packing: 28\*23\*10cm

Carton packing: 50\*30\*30cm Real weight: 1.7kg Volum weight: 2.3kg

### Output power (EIRP)

GSM850 : 33 dBm; GSM900 : 33 dBm

DCS1800: 30 dBm; PCS1900: 30 dBm

### Function support

ADMS, Work-code, DST, Self-Service Query, Automatic Status, T9 Input, Photo-ID, 9 Digit User ID, Short message

### Customize Function

Proximity card or Mifare card